




\*ALL TREAD SURFACES ARE BROOM FINISHED.

\*TREAD, PLATFORM, AND SIDEWALL THICKNESS IS MIN. 3" TO MAX. 7".

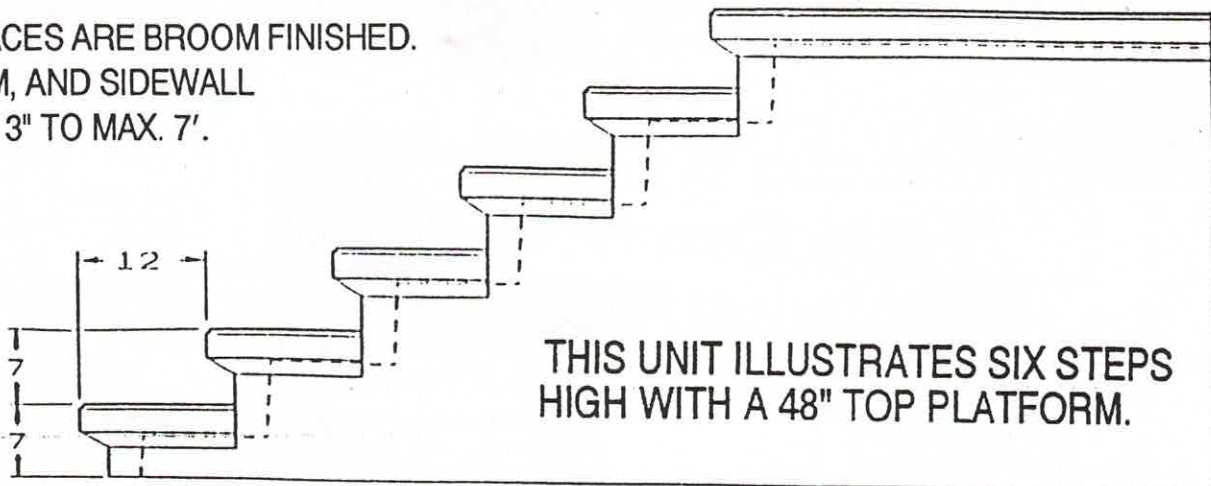

\*NOTE - DO NOT USE SALT OR CHEMICALS TO REMOVE SNOW OR ICE. THEY ARE HARMFUL TO THE SURFACE OF ANY CONCRETE.

- \*RISERS ARE A COMFORTABLE 7"
- \*TREADS MEASURE A WIDE 12"
- \*PRE-CAST IN ONE SOLID UNIT
- \*THOROUGHLY VIBRATED FOR MAXIMUM DENSITY
- \*TREAD IS A SKID RESISTANT BRUSHED SURFACE
- \*HIGH QUALITY 5000 P.S.I. CONCRETE
- \*SOLID 3" MINIMUM THICKNESS THROUGHOUT
- \*DISTINCTIVE STYLE MAXIMIZES THE QUALITY APPEARANCE
- \*TEST PROVEN PRODUCT

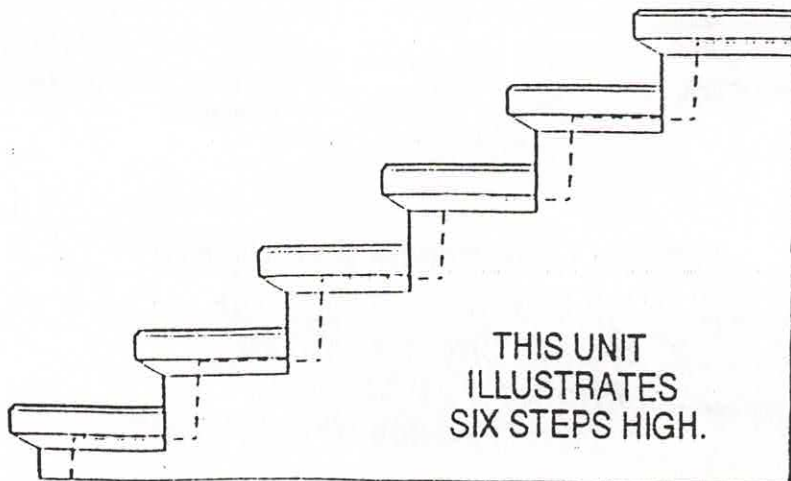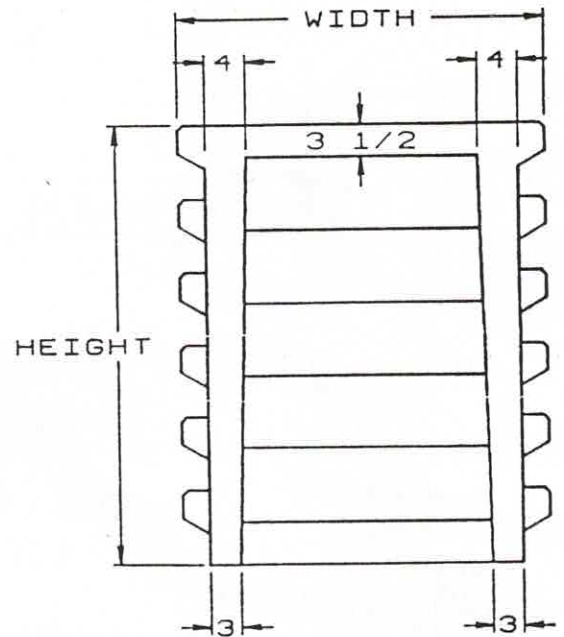

## HOW TO ORDER:

1. DETERMINE THE DIMENSION OF YOUR RISE FROM TOP TO BOTTOM. REMEMBER: RISER 7" TREAD 12". THIS IS YOUR MOST IMPORTANT MEASUREMENT.
2. DETERMINE THE WIDTH OF THE STEP 3' - 4' - 5' - 6'. AND THE OPTION OF A TOP PLATFORM.
3. REFER TO THE CHART FOR TYPES AVAILABLE AND SELECT THE SIZE MOST SUITABLE TO YOUR NEEDS.